



# DIRIS A40/A41

## Multifunction meters - PMD

Multi-measurement meter - dimensions 96 x 96 mm

Single-circuit metering,  
measurement &  
analysis



DIRIS A41

### Function

**DIRIS A40** and **A41** are panel mounted measurement units which ensure the user has access to all the measurements required for successfully carrying out energy efficiency projects and ensuring the electrical distribution is monitored.

All this information can be analysed remotely using the VERTELIS software solution.

The DIRIS A41 has a CT current input for measuring the neutral current.

### Advantages

#### Easy to use

Thanks to its large backlit LCD display and its multiple viewing screens with direct pushbutton access, DIRIS A4x provide clear readings and are easy to use.

They directly display a number of multi-measurement and metering values : +/- kWh, +/- kvarh, kVAh, I, U, V, F, P, Q, S, PF, etc.


#### Detects wiring errors

An integrated test function can be utilised to detect incorrect wiring and to automatically correct CT installation errors.

#### Customisable

Thanks to the wide range of optional modules, the product can be customised or upgraded after installation.

### Principle diagram

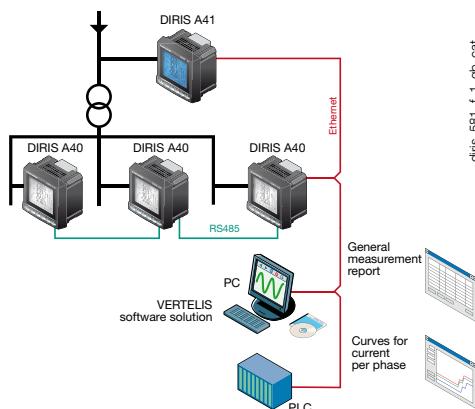

### The solution for

- > Industry
- > Data centres
- > Infrastructures



### Strong points

- > Easy to use
- > Detects wiring errors
- > Customisable
- > Webserver function
- > Compliant with IEC 61557-12

### Conformity to standards

- > IEC 61557-12
- > IEC 62053-22 class 0.5S
- > IEC 62053-23 class 2



### Functions

#### Multi-measurement

- Currents
  - instantaneous: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>, I<sub>system</sub>
  - average/maximum average: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
- Voltages & frequency
  - instantaneous: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F, V<sub>system</sub>, U<sub>system</sub>
  - average/maximum average: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F
- Power
  - instantaneous: 3P,  $\Sigma$ P, 3Q,  $\Sigma$ Q, 3S,  $\Sigma$ S
  - maximum average:  $\Sigma$ P,  $\Sigma$ Q,  $\Sigma$ S
  - predictive: ( $\Sigma$ P), ( $\Sigma$ Q), ( $\Sigma$ S)
- Power factors
  - instantaneous: 3PF,  $\Sigma$ PF
  - average/maximum average:  $\Sigma$ PF

#### Metering

- Active energy: +/- kWh
- Reactive energy: +/- kvarh
- Apparent power: kVAh
- Hours:

#### Harmonic analysis

- Total harmonic distortion
- Currents: thd I<sub>1</sub>, thd I<sub>2</sub>, thd I<sub>3</sub>, thd I<sub>n</sub>
- Phase-to-neutral voltage: thd V<sub>1</sub>, thd V<sub>2</sub>, thd V<sub>3</sub>
- Phase-to-phase voltage: thd U<sub>12</sub>, thd U<sub>23</sub>, thd U<sub>31</sub>

#### Individual up to level 63

- Currents: H<sub>11</sub>, H<sub>12</sub>, H<sub>13</sub>, H<sub>ln</sub>
- Phase-to-neutral voltage: H<sub>1V</sub>, H<sub>2V</sub>, H<sub>3V</sub>,
- Phase-to-phase voltage: H<sub>U12</sub>, H<sub>U23</sub>, H<sub>U31</sub>

#### Load curves<sup>(1)</sup>

- Active and reactive power:  $\Sigma$ P +/- ;  $\Sigma$ Q +/-
- Voltages & frequency: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F

#### Events<sup>(1)</sup>

- Alarms on all electrical values.

#### Communications<sup>(1)</sup>

- RS485 MODBUS RTU & PROFIBUS DP
- Ethernet (MODBUS TCP or RTU over TCP and Web server)
- Ethernet with RS485 gateway MODBUS RTU over TCP

#### Inputs / Outputs<sup>(1)</sup>

- Pulse metering
- Remote control/command
- Alarm report
- Pulse report

#### Analogue output

- 0/4- 20 mA analogue output

(1) Available as an option  
(see the following pages).

## Front panel



1. Backlit LCD display.
2. Direct access key for currents and test function.
3. Direct access key for voltages and frequency.
4. Direct access key for active, reactive, and apparent powers and power factor.
5. Direct access key for maximum and average current and power values.
6. Direct access key for harmonic values.
7. Direct access key for energies, hour meter and programming menu.

## Plug-in modules

<b>DIRIS® A40</b>	The main unit of the DIRIS A40 series, featuring a digital display and several physical input/output terminals at the bottom.	<b>Pulse outputs</b> diris_445_a_1_cat 2 configurable pulse outputs (type, weight and duration) on $\pm$ kWh, $\pm$ kvarh and kWh.
<b>DIRIS® A41*</b>	The main unit of the DIRIS A41 series, similar in design to the A40 but with a different front panel configuration.	<b>Communication MODBUS®</b> diris_447_a_1_cat RS485 link with MODBUS® protocol (speed up to 38400 bauds).
		<b>PROFIBUS® DP communication</b> diris_775_a_1_cat SUB-D9 link with PROFIBUS® DP protocol (speed up to 12 Mbauds).
		<b>Ethernet communication</b> diris_777_a_1_cat <ul style="list-style-type: none"> <li>Ethernet connection with MODBUS TCP or MODBUS RTU over TCP protocol.</li> <li>Embedded Webserver function <sup>(1)</sup>.</li> </ul>
		<b>Ethernet communication with RS485 MODBUS gateway</b> diris_776_a_1_cat <ul style="list-style-type: none"> <li>Ethernet connection with MODBUS TCP or MODBUS RTU over TCP protocol.</li> <li>Connection of 1 to 247 RS485 MODBUS slaves.</li> <li>Embedded Webserver function <sup>(1)</sup>.</li> </ul>
		<b>Analogue outputs</b> diris_448_a_1_cat A maximum of 2 modules may be connected, providing up to 4 analogue outputs. Per module 2 outputs assignable to: 3I, In, 3V, 3U, F, $\pm$ $\Sigma$ P, $\pm$ $\Sigma$ Q, $\Sigma$ S, $\Sigma$ PFL/C, I sys, Vsys, Usys, Ppred, Q pred, Spred, T°C internal, T°C 1, T°C 2, T°C3 and to 17 VDC power supply.
		<b>2 inputs - 2 outputs</b> diris_449_a_1_cat A maximum of 3 modules may be connected, providing up to 6 inputs and 6 outputs. Per module 2 outputs assignable to: <ul style="list-style-type: none"> <li>monitoring: 3I, In, 3V, 3U, F, <math>\pm</math> <math>\Sigma</math>P, <math>\pm</math> <math>\Sigma</math>Q, SS, <math>\Sigma</math>PFL/C, THD 3I, THD In, THD 3V, THD 3U, Ppred, Qpred, Spred, internal T°C, T°C 1, T°C2, T°C3 and hour meter,</li> <li>remote control,</li> <li>timed remote control.</li> <li>2 inputs for pulse metering.</li> </ul>
		<b>Memory</b> <ul style="list-style-type: none"> <li>Storing up to a maximum of 62 days of P+, P-, Q+, Q- with an internal or external synchronisation signal of 5, 8, 10, 15, 20, 30 and 60 minutes.</li> <li>Storing of 10 hour-dated last alarms.</li> <li>Storing of the last minimum and maximum instantaneous values for 3U, 3V, 3I, In, F, <math>\Sigma</math>P<math>\pm</math>, <math>\Sigma</math>Q<math>\pm</math>, <math>\Sigma</math>S, THD 3U, THD 3V, THD, 3U, THD, 3V, THD, 3I, THD In.</li> <li>Storing of 3U, 3V and F average values based on synchronisation function (maximum 60 days).</li> </ul>
		<b>Temperature<sup>(2)</sup></b> diris_747_a_2_cat Temperature indication: <ul style="list-style-type: none"> <li>internal,</li> <li>external sensor PT 100 (T°C 1),</li> <li>external sensor PT 100 (T°C 2),</li> <li>external sensor PT 100 (T°C 3).</li> </ul>

\* with a factory fitted neutral CT module.

<sup>(1)</sup> See "Management software for DIRIS" p. 142.

<sup>(2)</sup> See "external sensor PT 100" p. 115.

# DIRIS A40/A41

Multifunction meters - PMD

Multi-measurement meter - dimensions 96 x 96 mm

## Accessories

Current transformers  
(see page 98)



IP65 protection




Panel mounting kit for a 144 x 96 mm cut-out



## Terminals


DIRIS A40

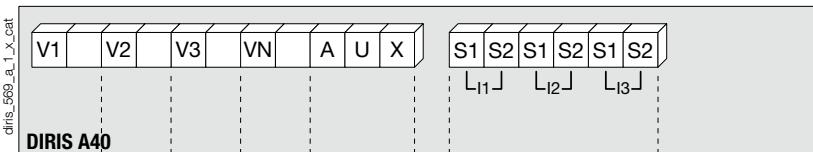

S1 - S2: current inputs

AUX: auxiliary power supplies U<sub>s</sub>  
V1 - V2 - V3 - VN: voltage inputs


DIRIS A41

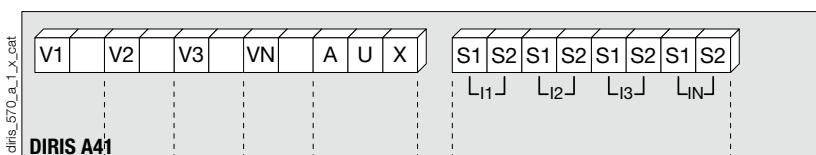

S1 - S2: current inputs

AUX: auxiliary power supplies U<sub>s</sub>  
V1 - V2 - V3 - VN: voltage inputs


Communication module

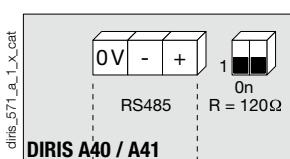

RS485 link.

R = 120 Ω: selectable internal resistance for RS485 end of line termination.


Pulse output module

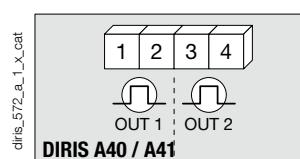

1 - 2: pulse output n°1.

3 - 4: pulse output n°2.


Analogue output module

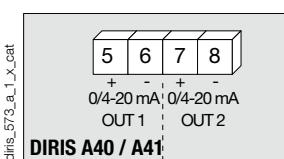

5 - 6: analogue output n°1.

7 - 8: analogue output n°2.

2 inputs / 2 outputs module

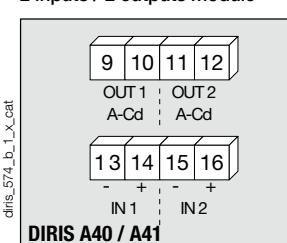


9 - 10: relay output n°1.

11 - 12: relay output n°2.

13 - 14: opto input n°1.


15 - 16: opto input n°2.

Memory module

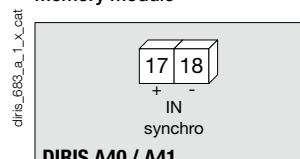

17 - 18: synchronisation input.

Temperature module

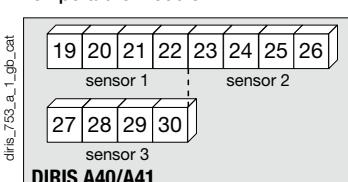

Sensor 1 Sensor 2 Sensor 3


19: red 23: red 27: red

20: red 24: red 28: red


21: white 25: white 29: white

22: white 26: white 30: white

Ethernet Module



Ethernet module + RS485 MODBUS gateway

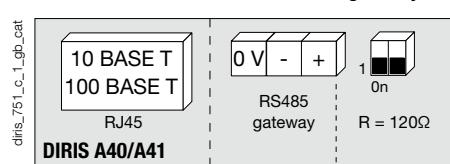

## Electrical characteristics


<b>Current measurement on insulated inputs (TRMS)</b>	
Via CT primary	9 999 A
Via CT secondary	1 or 5 A
Measurement range	0 ... 11 kA
Input consumption	≤ 0.1 VA
Measurement updating period	1 s
Accuracy	0.2 %
Permanent overload	6 A
Intermittent overload	10 I <sub>n</sub> for 1 s
<b>Voltage measurements (TRMS)</b>	
Direct measurement between phases	50 ... 700 VAC
Direct measurement between phase and neutral	28 ... 404 VAC
VT primary	500 000 VAC
VT secondary	60, 100, 110, 173, 190 VAC
Frequency	50 / 60 Hz
Input consumption	≤ 0.1 VA
Measurement updating period	1 s
Accuracy	0.2 %
Permanent overload	800 VAC
<b>Current-voltage product</b>	
Limitation for 1A CT	10 000 000
Limitation for 5A CT	10 000 000
<b>Power measurement</b>	
Measurement updating period	1 s
Accuracy	0.5 %
<b>Power factor measurement</b>	
Measurement updating period	1 s
Accuracy	0.5 %
<b>Frequency measurement</b>	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1 %
<b>Energy accuracy</b>	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2
<b>Auxiliary power supply</b>	
Alternating voltage	110 ... 400 VAC
AC tolerance	± 10 %
Direct voltage	120 ... 350 VDC / 12 ... 48 VDC
DC tolerance	± 20 % / - 6 ... + 20 %
Frequency	50 / 60 Hz
Consumption	≤ 10 VA

<b>2 inputs / 2 outputs module: Outputs (alarms / control)</b>	
Number of relays	2 <sup>(1)</sup>
Type	250 VAC - 5 A - 1150 VA
<b>2 inputs / 2 outputs module: Phototransistor inputs</b>	
Number	2 <sup>(1)</sup>
Power supply	10 ... 30 VDC
Minimum signal width	10 ms
Minimum duration between 2 pulses	18 ms
Type	phototransistors
<b>Pulse output module</b>	
Number of relays	2
Type	100 VDC - 0.5 A - 10 VA
Max. number of operations	≤ 10 <sup>8</sup>
<b>Analogue output module</b>	
Number of outputs	2 <sup>(2)</sup>
Type	insulated
Range	0 / 4 ... 20 mA
Load resistance	600 Ω
Maximum current	30 mA
<b>MODBUS communication module</b>	
Link	RS485
Type	2 ... 3 half duplex wires
Protocol	MODBUS RTU
MODBUS® speed	4800 ... 38400 bauds
<b>PROFIBUS-DP communication module</b>	
Link	SUB-D9
Protocol	PROFIBUS® DP
PROFIBUS® speed	9.8 kbauds ... 12 Mbauds
<b>Ethernet communication module</b>	
Connection	RJ45
Speed	10 base T / 100 base T
Protocol	MODBUS TCP or MODBUS RTU over TCP
<b>Temperature module (inputs)</b>	
Type	PT100
Connection	2, 3 or 4 wires
Dynamic	- 20 °C ... 150 °C
Accuracy	+/ - 1 digit
Maximum length	300 cm
<b>Operating conditions</b>	
Operating temperature	- 10 ... + 55 °C
Storage temperature	- 20 ... + 85 °C
Relative humidity	95 %

(1) Max. 3 modules / DIRIS.

(2) Max. 2 modules / DIRIS.

## Case

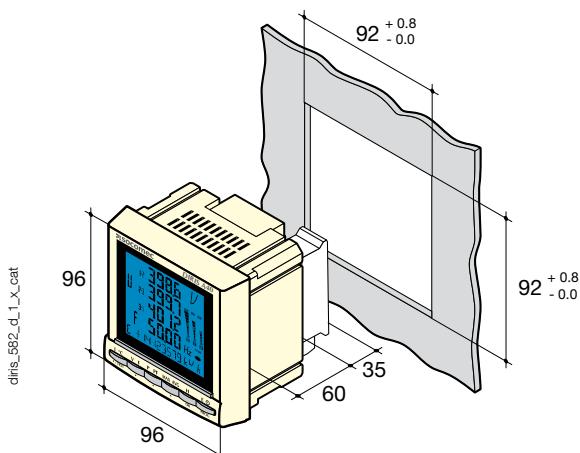

Type	panel mounting
Dimensions W x H x D	96 x 96 x 60 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	backlit LCD display
Terminal blocks type	fixed or plug-in
Voltage and other connection cross-section	0.2 ... 2.5 mm <sup>2</sup>
Current connection cross-section	0.5 ... 6 mm <sup>2</sup>
Weight	400 g

# DIRIS A40/A41

## Multifunction meters - PMD

Multi-measurement meter - dimensions 96 x 96 mm


### Connections

**Recommendation:** When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI, an accessory which is included in this catalogue. Please consult us.

In TNC neutral systems it is recommended to use the functional earth module.

#### Low voltage balanced network for DIRIS A40


##### 3/4 wires with 1 CT

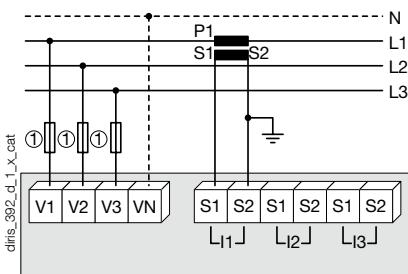

Use of 1 CT reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.


1. Fuses 0.5 A gG / 0.5 A class CC.

##### Single-phase

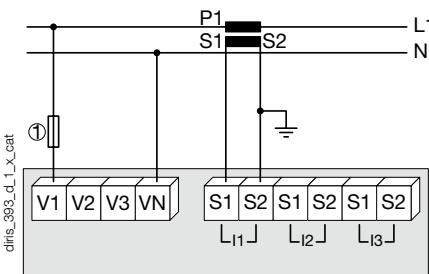

1. Fuses 0.5 A gG / 0.5 A class CC.


##### Two-phase

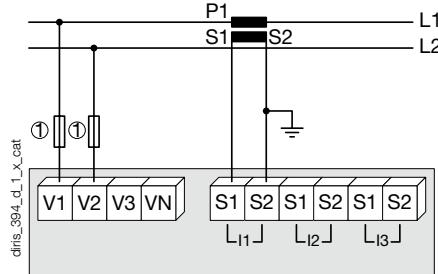

1. Fuses 0.5 A gG / 0.5 A class CC.


#### Low voltage unbalanced network for DIRIS A40

##### 3/4 wires with 3 CTs

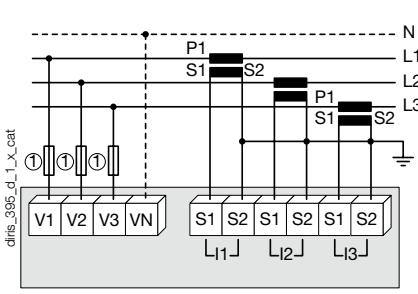

1. Fuses 0.5 A gG / 0.5 A class CC.


##### 3 wires with 2 CTs

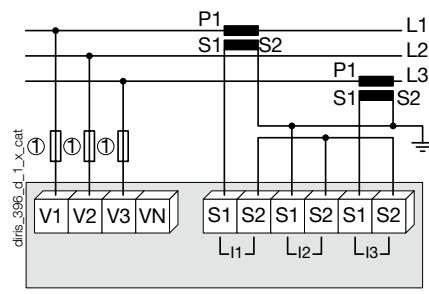

Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

##### 3 wires with 2 CTs

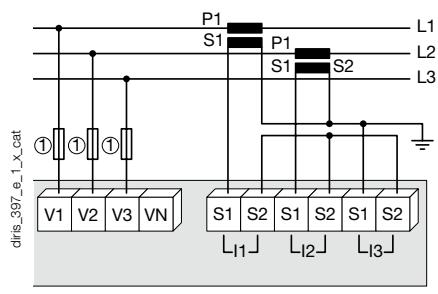


Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

#### Low voltage unbalanced network for DIRIS A41


##### 4 wires with 4 CTs

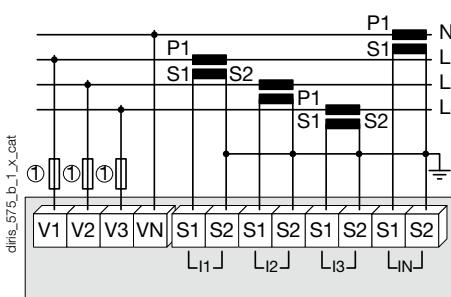


1. Fuses 0.5 A gG / 0.5 A class CC.

### Additional information

#### Communication via RS485 link

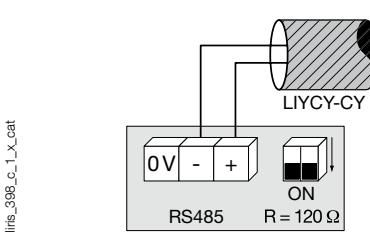


#### Connection of voltage transformer for HV networks

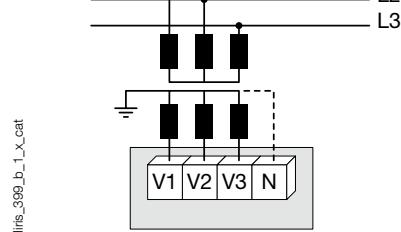

#### AC & DC auxiliary power supply

110 / 400 VAC (IEC)  
120 / 350 VDC (IEC)



1. Fuses 0.5 A gG / 0.5 A class CC.

## References

Basic device	DIRIS A40		DIRIS A41 with CT on the neutral Reference
<b>Auxiliary power supply U<sub>s</sub></b>	<b>Reference</b>		<b>Reference</b>
110 ... 400 VAC / 120 ... 350 VDC	4825 0201		4825 0202
12 ... 48 VDC	4825 1201		4825 1202
<b>Options</b>			
<b>Plug-in modules<sup>(1)</sup></b>	<b>Reference</b>		<b>Reference</b>
Pulse outputs	4825 0090		4825 0090
RS485 MODBUS® communication	4825 0092		4825 0092
Analogue outputs	4825 0093		4825 0093
2 inputs / 2 outputs	4825 0094		4825 0094
Communication Sub D9 PROFIBUS®DP <sup>(2)</sup>	4825 0205		4825 0205
Memory	4825 0097		4825 0097
Embedded Webserver function <sup>(2)</sup> .	4825 0203		4825 0203
Ethernet communication + RS485 MODBUS gateway (Embedded Webserver function) <sup>(2)</sup>	4825 0204		4825 0204
Temperature inputs	4825 0206		4825 0206

(1) Ease of integration for additional functions (maximum 4 slots on A40 and 3 on A41).

(2) Dimension of the plug-in module: 2 slots.

Accessories	To be ordered in multiples of	Reference	To be ordered in multiples of	Reference
Description of accessories				
IP65 protection	1	4825 0089	1	4825 0089
Panel mounting kit for a 144 x 96 mm cut-out	1	4825 0088	1	4825 0088
Fuse disconnect switches for the protection of voltage inputs (type RM) 3 poles	4	5601 0018	4	5601 0018
Fuse disconnect switches for the protection of the auxiliary supply (type RM) 1 pole + neutral	6	5601 0017	6	5601 0017
Fuse type gG 10x38 0.5 A	10	6012 0000	10	6012 0000
Current transformer range	1	See page	1	See page 98
Ferrite to be associated with communication modules	1	4899 0011		4899 0011
Temperature sensor PT100 - M6 screw type	1	4825 0208	1	4825 0208
Temperature sensor PT100 - M6 eyelet type	1	4825 0209	1	4825 0209
Management software for DIRIS				See page 142

## Services & Technical Assistance

- Technical site audits and solution specification, commissioning, maintenance, training... Our Services & Technical Assistance experts offer you personalised support to ensure success with all your projects.

