

PolyPhase BS Standard Credit Meter

5219

Technical Data



The 5219 is a whole current three phase credit meter, capable of measuring Active (kWh) (class 1.0) and Reactive energy (KVArh) (class 2.0).

Document number: IB057  
Date: 05.12.2008  
5219 Technical Specification

## 5219 Technical Specifications

### General

#### Voltage

Nominal Voltage $U_n$	220-240V
Voltage Range	80-115% $U_n$
Voltage Withstand	415V Continuous

#### Frequency

Nominal Frequency	50/60Hz
Frequency Variation	+/- 2%

### IEC-Specific Data

#### Current

Base Current	
Direct Connection $I_b$	5, 10, 15, 20A
Current Max	
$I_{max}$	80, 100, 105, 120, 125A

#### Measurement Accuracy

Measuring Accuracy	
	IEC 62053-21 Class 1 or 2
	IEC 62053-23 Class 2 or 3

#### Measurement Behaviour

Starting Current	
IEC	Class 1 0.4% of $I_b$ Class 2 0.5% of $I_b$

#### Max Measuring Range

20mA up to 100A

### Approvals

Quality	Manufactured to ISO 9001:2000
Certified Life	20 years
	15 years with Neutral Disconnection Functionality
OFGEM Approval Number	981

#### Operating Behaviour\*\*

Voltage Interruptions (Power Down)	
Blocking of inputs and outputs	Immediate
Standby Operation	for 0.15s
Data Storage after	0.15s
Switch Off	after approx 0.15s

#### Voltage Restoration (Power Up)

Function Standby	<5s
(depending on duration of failure)	
Detection of energy direction and phase voltage	<5s

#### Power Supply Quality

The meter complies with EN63052-11 Section 7.1.1 Voltage range and 7.1.2 Voltage dips and short interruptions

### General

#### Power Consumption

Voltage Circuit	<3W
	<15VA
Current Circuit	<4VA

#### Environmental Influences

Temperature Test	IEC62053-21, IEC62053-23
------------------	--------------------------

#### Temperature Range

Operation	-10°C to +45°C
Power Measurement Range	-25°C to +55°C
Storage	-25°C to +70°C
This complies with EN 62052-11:2003 section 6.1	

#### Temperature Coefficient

Range	From -10°C to +45°C
Typical mean value	±0.015% per K
	IEC 62053-21
$\cos\varphi = 1$ (from 0.1 $I_b$ to $I_{max}$ )	±0.05% per K
$\cos\varphi = 1$ (from 0.2 $I_b$ to $I_{max}$ )	±0.07% per K

#### IEC 62053-23

$\sin\varphi = 1$ (from 0.1 $I_b$ to $I_{max}$ )	±0.10% per K
$\sin\varphi = 0.5$ (from 0.2 $I_b$ to $I_{max}$ )	±0.15% per K
Impermeability to IEC 60529	IP51

#### Shock Test

BS EN60068-2-27

#### Electromagnetic Compatibility

Electrostatic Discharges	to IEC 61000-4-2
Contact Discharges	8kV
Air Discharges	15kV

Electromagnetic RF Fields	to IEC 61000-4-3
80 MHz to 2 GHz	at least 10V/m

Radio Interference suppression to IEC/CISPR 22 Class B

#### Fast Transient burst Test

to IEC 61000-4-4

#### With basic current $I_b$ :

For current and voltage circuits	4kV
For auxiliary circuits >40V	4kV

With open current circuit	
for voltage and current circuits	4kV

#### Fast Transient Surge Test

to IEC 61000-4-5

Impulse Voltage	4kV
Impedance of source	2Ω
Rise/Decay time of impulse voltage	1.2μs/50μs
Rise/Decay time of impulse voltage	8μs/50μs

#### Case Material

##### Base, Top Cover and Terminal Cover

Flame retardant and UV stabilised polycarbonate


## Communication Interfaces

### Optical Interface

Type	serial, bi-directional interface
Protocol	IEC 62056-21

### Insulation Strength

Insulation Strength	4.4kV at 50Hz for 80 seconds
Impulse Voltage Strength	to IEC62053-11
Impulse Voltage	6kV
Impedance of source	500Ω
Rise/Decay time of impulse voltage	1.2μs/50μs

Protection Class II to IEC626050-131  2

## Display

### Characteristics

Type	7 character, 7 segment LCD
Digit size	8x3.5mm
Number of Digits	6 significant numbers 2dp

## Weight and Dimensions

### Weight

Standard	950g
With extended terminal cover	1070g

### Dimensions

Width	167.9mm
Height	175.8mm
Depth	56.3mm

### Terminal Details

Arrangement	BS5685
Size	8.3mm diameter


### IP Rating


With Short Terminal Cover	IP51
With Extended Terminal Cover	IP54

### Connections

Standard Layout and Dimensions


## Dimensions

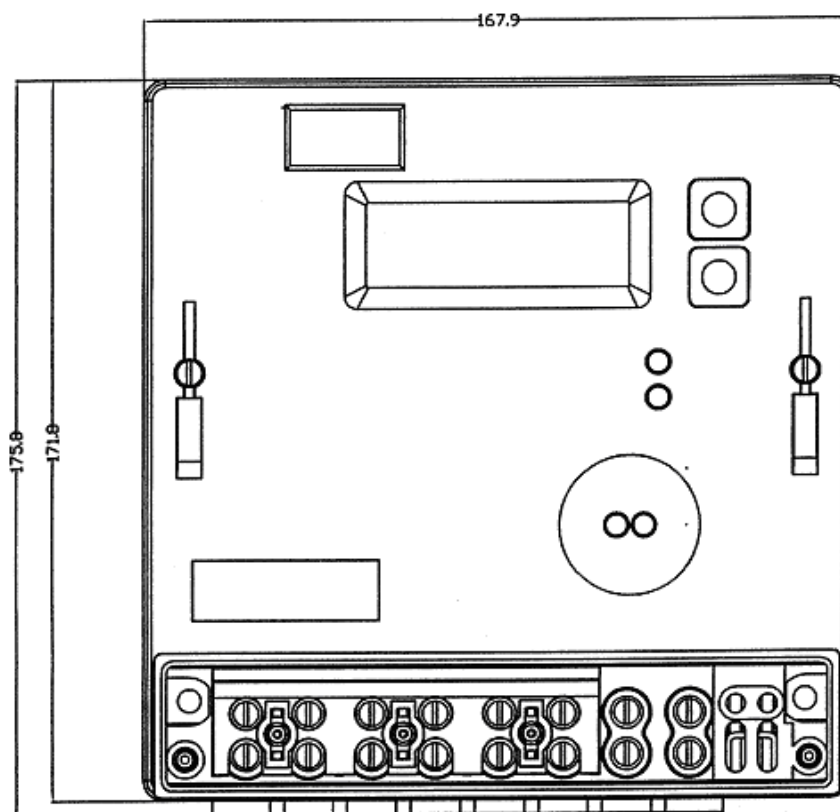

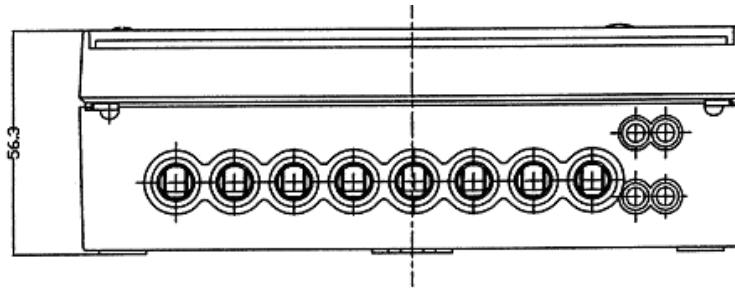


### Terminal Connection Diagrams


The Meter has 3 measuring elements capable of being configured as:

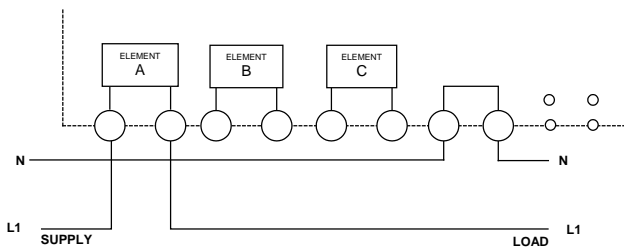


**Single Phase 2 Wire**

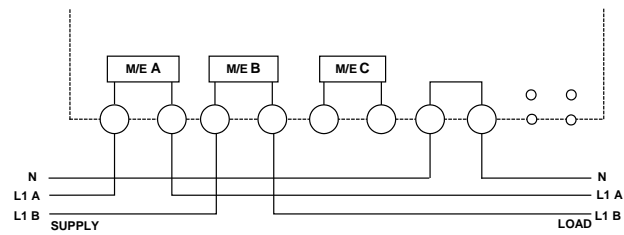

**Single Phase 3 Wire**

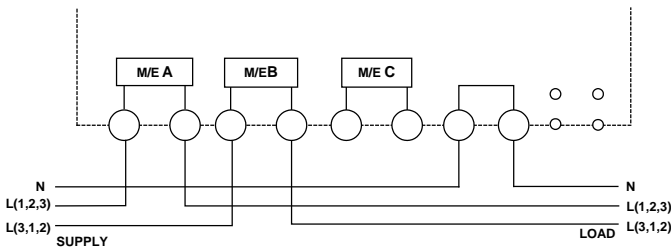

**2 Phases of 3 Phase 4 Wire**

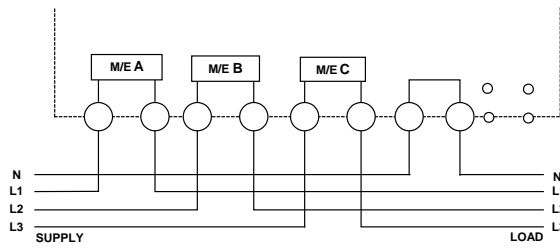

**3 Phase 4 Wire**

All rights reserved. Subject to change without notice.

**Landis + Gyr**  
 1 Lysander Drive,  
 Northfields Industrial Estate,  
 Market Deeping,  
 Peterborough  
 PE6 8FB  
[www.landisgyr.com](http://www.landisgyr.com)

