



## Technical Specification

Operating Temperature:	-5...+40°
Operating Humidity:	45...85% RH
Pollution Degree:	3
Installation Degree:	III
Degree of Protection:	IP65
Rated Operating Current:	≤ 80mA
Electrical Life:	≥30000 hours
Brightness:	≥60
Rated Operating Voltage:	See Order Codes
Base Colour:	See Order Codes

## Order Codes


AD56LT-R24	22mm lamp test indicator colour red 24Vac/dc
AD56LT-G24	22mm lamp test indicator colour green 24Vac/dc
AD56LT-B24	22mm lamp test indicator colour blue 24Vac/dc
AD56LT-Y24	22mm lamp test indicator colour yellow 24Vac/dc
AD56LT-W24	22mm lamp test indicator colour white 24Vac/dc
AD56LT-R110	22mm lamp test indicator colour red 110Vac
AD56LT-G110	22mm lamp test indicator colour green 110Vac
AD56LT-B110	22mm lamp test indicator colour blue 110Vac
AD56LT-Y110	22mm lamp test indicator colour yellow 110Vac
AD56LT-W110	22mm lamp test indicator colour white 110Vac
AD56LT-R220	22mm lamp test indicator colour red 230Vac
AD56LT-G220	22mm lamp test indicator colour green 230Vac
AD56LT-B220	22mm lamp test indicator colour blue 230Vac
AD56LT-Y220	22mm lamp test indicator colour yellow 230Vac
AD56LT-W220	22mm lamp test indicator colour white 230Vac

## Accessories

AD56SPAN	Spanner for tightening locknuts
----------	---------------------------------



## Dimensions

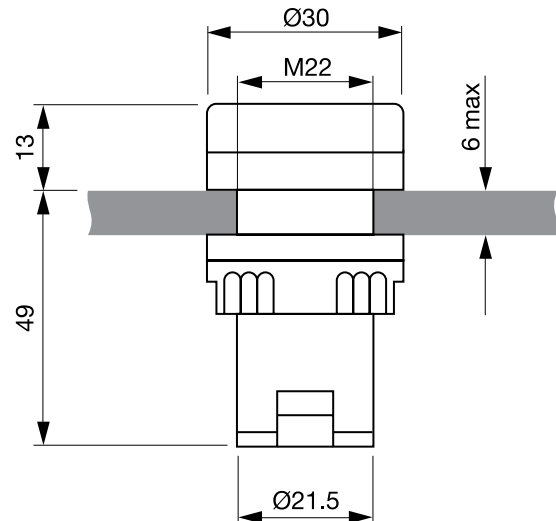

## Circuits

### Wiring

